

---

# EAZYCLAD ROOFING & CLADDING

---

## SECTION GUIDE

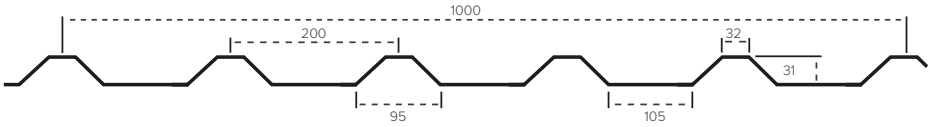
|                      |     |
|----------------------|-----|
| 200 ROOF RANGE ..... | 115 |
| 200 WALL RANGE ..... | 116 |
| FLASHINGS .....      | 117 |

# THE EAZYCLAD 200 ROOF & WALL RANGE.

QUALITY  
CLADDING AT  
AFFORDABLE  
PRICES.

**NEW!**  
PRODUCT  
LINE.

## 200 ROOF RANGE



\* Available with 50mm swages upon request

| DIMENSION DETAILS |        |
|-------------------|--------|
| COVER WIDTH       | 1000mm |
| PROFILE PITCH     | 200mm  |
| PROFILE DEPTH     | 31mm   |
| CROWN WIDTH       | 32mm   |
| VALLEY WIDTH      | 105mm  |
| RIB WIDTH         | 95mm   |

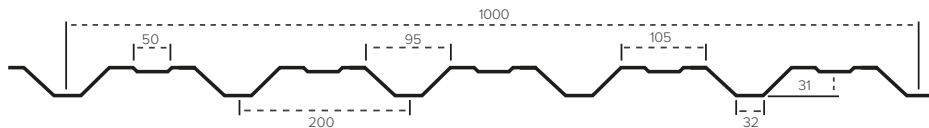
| WEIGHT PER LINEAR METRE |         |
|-------------------------|---------|
| 0.7mm                   | 6.70 kg |
| 0.5mm                   | 4.79 kg |

| SAFE WORKING LOAD (ULTIMATE / 1.5) |             |           |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------------------------------------|-------------|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|                                    |             | SPAN (M)  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| GRAVITY                            | L/200       | THICKNESS | 1.00 | 1.10 | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 | 1.90 | 2.00 | 2.10 | 2.20 | 2.30 | 2.40 | 2.50 | 2.60 |
|                                    | SINGLE SPAN | 0.7       | 6.11 | 5.05 | 4.24 | 3.61 | 3.12 | 2.62 | 2.16 | 1.80 | 1.52 | 1.29 | 1.11 | 0.96 | 0.83 | 0.73 | 0.64 | 0.57 | 0.50 |
|                                    | DOUBLE SPAN | 0.7       | 3.30 | 2.87 | 2.52 | 2.23 | 1.99 | 1.78 | 1.61 | 1.46 | 1.34 | 1.22 | 1.13 | 1.04 | 0.96 | 0.89 | 0.83 | 0.78 | 0.73 |
|                                    | MULTI SPAN  | 0.7       | 3.92 | 3.41 | 3.00 | 2.66 | 2.38 | 2.14 | 1.93 | 1.76 | 1.61 | 1.47 | 1.36 | 1.25 | 1.16 | 1.08 | 1.01 | 0.94 | 0.88 |
|                                    | SINGLE SPAN | 0.5       | 3.10 | 2.82 | 2.59 | 2.24 | 1.93 | 1.68 | 1.42 | 1.18 | 1.00 | 0.85 | 0.73 | 0.63 | 0.55 | 0.48 | 0.56 | 0.37 | 0.33 |
|                                    | DOUBLE SPAN | 0.5       | 1.81 | 1.58 | 1.39 | 1.24 | 1.11 | 1.00 | 0.91 | 0.83 | 0.76 | 0.69 | 0.64 | 0.59 | 0.55 | 0.51 | 0.48 | 0.45 | 0.42 |
|                                    | MULTI SPAN  | 0.5       | 2.14 | 1.87 | 1.65 | 1.47 | 1.32 | 1.19 | 1.08 | 0.99 | 0.91 | 0.83 | 0.77 | 0.71 | 0.66 | 0.62 | 0.58 | 0.54 | 0.51 |

| SAFE WORKING LOAD (ULTIMATE / 1.5) |             |           |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------------------------------------|-------------|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|                                    |             | SPAN (M)  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| SUCTION                            | L/200       | THICKNESS | 1.00 | 1.10 | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 | 1.90 | 2.00 | 2.10 | 2.20 | 2.30 | 2.40 | 2.50 | 2.60 |
|                                    | SINGLE SPAN | 0.7       | 5.66 | 4.68 | 3.93 | 3.26 | 2.61 | 2.12 | 1.75 | 1.46 | 1.23 | 1.04 | 0.89 | 0.77 | 0.67 | 0.59 | 0.52 | 0.46 | 0.50 |
|                                    | DOUBLE SPAN | 0.7       | 3.42 | 2.97 | 2.61 | 2.32 | 2.07 | 1.86 | 1.68 | 1.53 | 1.40 | 1.28 | 1.18 | 1.09 | 1.01 | 0.94 | 0.86 | 0.78 | 0.73 |
|                                    | MULTI SPAN  | 0.7       | 4.05 | 3.53 | 3.11 | 2.76 | 2.47 | 2.23 | 2.02 | 1.84 | 1.68 | 1.54 | 1.42 | 1.29 | 1.12 | 0.98 | 0.86 | 0.94 | 0.84 |
|                                    | SINGLE SPAN | 0.5       | 3.10 | 2.82 | 2.42 | 2.06 | 1.71 | 1.39 | 1.14 | 0.95 | 0.80 | 0.68 | 0.59 | 0.51 | 0.44 | 0.39 | 0.34 | 0.37 | 0.33 |
|                                    | DOUBLE SPAN | 0.5       | 1.87 | 1.64 | 1.45 | 1.29 | 1.16 | 1.04 | 0.95 | 0.86 | 0.79 | 0.73 | 0.67 | 0.62 | 0.58 | 0.54 | 0.50 | 0.45 | 0.42 |
|                                    | MULTI SPAN  | 0.5       | 2.21 | 1.94 | 1.71 | 1.53 | 1.37 | 1.24 | 1.13 | 1.03 | 0.94 | 0.87 | 0.80 | 0.75 | 0.69 | 0.64 | 0.56 | 0.54 | 0.51 |

## MORE THAN STEEL

## 200 WALL RANGE



\* Available without 50mm swages upon request

| DIMENSION DETAILS |        |
|-------------------|--------|
| COVER WIDTH       | 1000mm |
| PROFILE PITCH     | 200mm  |
| PROFILE DEPTH     | 31mm   |
| CROWN WIDTH       | 32mm   |
| VALLEY WIDTH      | 105mm  |
| RIB WIDTH         | 95mm   |

| WEIGHT PER LINEAR METRE |         |
|-------------------------|---------|
| 0.7mm                   | 6.70 kg |
| 0.5mm                   | 4.79 kg |

## SAFE WORKING LOAD (ULTIMATE / 1.5)

## SPAN (M)

| GRAVITY     | L/200       | THICKNESS | 1.00 | 1.10 | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 | 1.90 | 2.00 | 2.10 | 2.20 | 2.30 | 2.40 | 2.50 | 2.60 |
|-------------|-------------|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|             | SINGLE SPAN | 0.7       | 5.66 | 4.68 | 3.93 | 3.35 | 2.89 | 2.51 | 2.21 | 1.94 | 1.64 | 1.39 | 1.19 | 1.03 | 0.90 | 0.78 | 0.69 | 0.61 | 0.54 |
| DOUBLE SPAN | 0.7         | 3.42      | 2.97 | 2.61 | 2.32 | 2.07 | 1.86 | 1.68 | 1.53 | 1.40 | 1.28 | 1.18 | 1.09 | 1.01 | 0.94 | 0.88 | 0.82 | 0.77 |      |
| MULTI SPAN  | 0.7         | 4.05      | 3.53 | 3.11 | 2.76 | 2.47 | 2.23 | 2.02 | 1.84 | 1.68 | 1.54 | 1.42 | 1.31 | 1.22 | 1.13 | 1.06 | 0.99 | 0.91 |      |
| SINGLE SPAN | 0.5         | 3.10      | 2.82 | 2.42 | 2.06 | 1.78 | 1.55 | 1.36 | 1.21 | 1.07 | 0.91 | 0.78 | 0.67 | 0.59 | 0.51 | 0.45 | 0.40 | 0.36 |      |
| DOUBLE SPAN | 0.5         | 1.87      | 1.64 | 1.45 | 1.29 | 1.16 | 1.04 | 0.95 | 0.86 | 0.79 | 0.73 | 0.67 | 0.62 | 0.58 | 0.54 | 0.50 | 0.47 | 0.44 |      |
| MULTI SPAN  | 0.5         | 2.21      | 1.94 | 1.71 | 1.53 | 1.37 | 1.24 | 1.13 | 1.03 | 0.94 | 0.87 | 0.80 | 0.75 | 0.69 | 0.65 | 0.60 | 0.57 | 0.53 |      |

## SAFE WORKING LOAD (ULTIMATE / 1.5)

## SPAN (M)

















| SUCTION     | L/200       | THICKNESS | 1.00 | 1.10 | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 | 1.90 | 2.00 | 2.10 | 2.20 | 2.30 | 2.40 | 2.50 | 2.60 |
|-------------|-------------|-----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|             | SINGLE SPAN | 0.7       | 6.11 | 5.05 | 4.24 | 3.61 | 3.12 | 2.71 | 2.39 | 2.11 | 1.88 | 1.69 | 1.47 | 1.27 | 1.11 | 0.97 | 0.85 | 0.76 | 0.67 |
| DOUBLE SPAN | 0.7         | 3.30      | 2.87 | 2.52 | 2.23 | 1.99 | 1.78 | 1.61 | 1.46 | 1.34 | 1.22 | 1.13 | 1.04 | 0.96 | 0.89 | 0.83 | 0.78 | 0.73 |      |
| MULTI SPAN  | 0.7         | 3.92      | 3.41 | 3.00 | 2.66 | 2.38 | 2.14 | 1.93 | 1.76 | 1.61 | 1.47 | 1.36 | 1.25 | 1.16 | 1.08 | 1.01 | 0.94 | 0.88 |      |
| SINGLE SPAN | 0.5         | 3.10      | 2.82 | 2.59 | 2.24 | 1.93 | 1.68 | 1.48 | 1.31 | 1.17 | 1.05 | 0.95 | 0.84 | 0.73 | 0.64 | 0.56 | 0.50 | 0.44 |      |
| DOUBLE SPAN | 0.5         | 1.81      | 1.58 | 1.39 | 1.24 | 1.11 | 1.00 | 0.91 | 0.83 | 0.76 | 0.69 | 0.64 | 0.59 | 0.55 | 0.51 | 0.48 | 0.45 | 0.42 |      |
| MULTI SPAN  | 0.5         | 2.14      | 1.87 | 1.65 | 1.47 | 1.32 | 1.19 | 1.08 | 0.99 | 0.91 | 0.83 | 0.77 | 0.71 | 0.66 | 0.62 | 0.58 | 0.54 | 0.51 |      |

## FLASHINGS

### WHAT WE OFFER

The construction industry demands a wide and varied range of products to finish metal buildings and close the joints where building elements meet. These include everything from standard perimeter flashings to ridge closures and drip flashings. If an attractive, functional finish is needed to complete a metal building envelope then the sensible choice for flashings is here.

Available in a range of colours, we can supply highly finished flashings that are expertly manufactured, delivered on-time and perfectly match, complement or contrast the roof and wall cladding. Ridge vents are available for ventilated constructions, especially useful to complement the DRIPSTOP condensation control fleece.

|   |  |   |   |
|---|--|---|---|
| <p>RIDGE</p>  <p>Ref: 7101</p>           | <p>RIDGE WITH STIFFENERS</p>  <p>Ref: 7102</p>      | <p>RIDGE WITH WELTS</p>  <p>Ref: 7103</p>        | <p>MONO RIDGE</p>  <p>Ref: 7104</p>            |
| <p>BARGEBOARD</p>  <p>Ref: 7105</p>      | <p>BARGEBOARD WITH STIFFENERS</p>  <p>Ref: 7106</p> | <p>SQUARE DOWNPIPE</p>  <p>Ref: 7107</p>         | <p>SHADOWLINE BARGEBOARD</p>  <p>Ref: 7108</p> |
| <p>VALLEY GUTTER</p>  <p>Ref: 7109</p> | <p>TRIM/wATER</p>  <p>Ref: 7110</p>               | <p>BARGEBOARD WITH WELTS</p>  <p>Ref: 7111</p> | <p>EXPANSION JOINT</p>  <p>Ref: 7112</p>    |
| <p>DRIP/CILL</p>  <p>Ref: 7113</p>     | <p>EAVES</p>  <p>Ref: 7114</p>                    | <p>JAMB</p>  <p>Ref: 7115</p>                  | <p>Z SPACER FLASHING</p>  <p>Ref: 7116</p>  |